


SPG PSTN card



The SPG PSTN Telephone line card will add additional backup support for the S1000 Smart Controller allowing the panel to report over a telephone line using both SPG and open protocols.

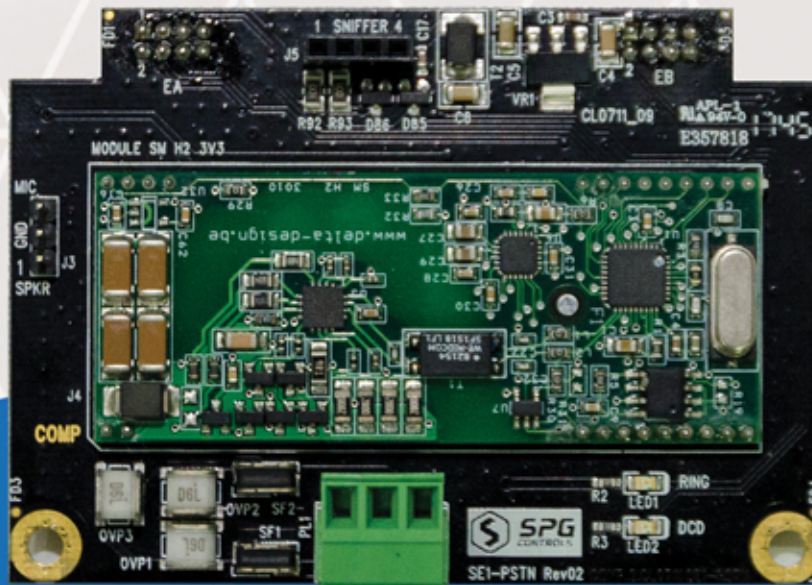

Wide range
of modulation
supported



Arco,
Contact ID or
SIA reporting



Speaker/
Microphone
support



Auto card
detection
on S1000

Technical Specifications

Modulation and protocols	ITU-T V.92 V.90, V.34,V.32bis, V.32, V.22bis V.21,Bell 212A, Bell103 V.23 Reversing,V.23 half-duplex V.29, V22bis fast connect
Error Correction	ITU-V.42
Isolation	3 kV
Temperature	-10°C to 70°C
Humidity	5%(0°C) to 95%(40°C)
Power Consumption	Idle 15mA @ 12VDC / Peak 50mA @ 12VDC
Protocols	ARCO over PSTN, Contact ID, SIA.
Dimensions	80mm x 56mm
Weight	50g



Ordering Information

Part Number	Product Code	Description
200104	SE1-PSTN-PCB	PSTN Telephone line expansion card